



Engineered Motion. Proven Reliability.

Perma-Pax® Packed Slip Joints

Hyspan Precision Products™
Product Catalog

Series 6500



Hyspan Precision Products, Inc.

1685 Brandywine Avenue · Chula Vista, CA 91911
hyspan.com · +1 619.421.1355 · websales@hyspan.com
© 2026 Hyspan Precision Products, Inc. All rights reserved.

CONTENTS

Company Overview	Hyspan capabilities, certifications, and engineering support
Series 6500 	PERMA-PAX® design features, product description, and key specifications
Design Features	Labeled cross-section diagram showing all design features
Applications	Installation configurations for single and dual anchor base joints
Guide Spacing & Travel	Table 1 intermediate pipe guide spacing; travel calculation method
Anchor Forces	Main anchor and intermediate anchor force requirements
Engineering Data	Table 2 thermal expansion; Table 3 pressure thrust & seal force data
Materials & Dimensions	Materials of construction; Table 4 dimensional data
Ordering Instructions	Part number structure, options, and anchor base information
Design Data Tables	Tables 5–8: dimensional data for all types at 150 & 300 PSIG
Installation & Maintenance	Installation procedure, preset, maintenance instructions
Engineering Support	Custom solutions, contact information, ordering guidance
Warranty	Five-year limited warranty — Series 6500

Note: This catalog covers Hyspan Precision Products Series 6500 PERMA-PAX® Packed Slip Joints. For metal bellows expansion joints, ball joints, and hose assemblies, refer to the applicable Hyspan product catalogs.

Company Overview

Engineered Motion. Proven Reliability.

Hyspan Precision Products designs and manufactures metal expansion joints, flexible metal hose assemblies, and motion-control components for mission-critical piping and pressure systems worldwide. Founded in 1968 and headquartered in Chula Vista, California, Hyspan has built a 50+ year record of engineering quality and manufacturing capability across industrial, energy, defense, aerospace, and commercial markets.

As a member of the Expansion Joint Manufacturers Association (EJMA), Hyspan designs and manufactures in accordance with applicable ASME, military, and international codes and standards. Products are built to order in Hyspan's vertically integrated manufacturing facilities, with complete material traceability and documented inspection at every stage.

Core Capabilities

- All four expansion joint technologies
- Metal bellows expansion joints
- Flexible metal hose assemblies and braided connectors
- Ball joints and slip joints
- Venturis, VibraSnubbers, struts and pipe alignment guides
- Custom engineered assemblies — ¼" to 32 ft diameter, full vacuum to 5,000+ PSIG
- Exotic materials: Inconel 625, Hastelloy, Monel, Titanium, and others
- FEA/CFD analysis, fatigue life evaluation, seismic and vibration modeling

Certifications



Markets Served

- Energy & Petrochemical — refineries, FCCU, piping systems
- Power & Utility — steam, hot water, district energy
- Defense & Maritime — NAVSEA-qualified, naval shipboard systems
- Aerospace — AS9100D certified, fatigue-rated precision bellows
- Advanced Technology & Development — UHV, R&D
- Commercial & Industrial — HVAC, mechanical rooms, building systems
- Automotive — OEM exhaust and flexible assembly manufacturing

For custom requirements, specification review, or application engineering support, contact Hyspan at websales@hyspan.com or +1 619.421.1355

Series 6500 – Perma-Pax® Packed Slip Joints



Nominal Sizes	2" – 24" NPS standard; larger diameters available
Design Pressure	150 PSIG and 300 PSIG standard
Test Pressure	225 PSIG (150 PSIG design), 450 PSIG (300 PSIG design)
Design Temperature	500°F
Axial Travel — Single	4", 8", or 12" compression; 1", 1.5", or 2" extension
Axial Travel — Dual	8", 16", or 24" total compression; 2", 3", or 4" total extension
Types	6501 (single, fixed flange), 6502 (single, weld end), 6505 (dual, fixed flange), 6506 (dual, weld end)
Packing System	Braided graphite-impregnated carbon fiber yarn + Grafoil® Flexible Graphite injected packing
Guides	Line-bored abrasion-free aluminum bronze internal & external guides (ASME SB169)
Standards	ASTM F 1007, Mil-E-17814; welded to ASME Code Section IX
CRN	0D25724.2134567890NTYC
Warranty	Five-year limited warranty — see Warranty section

Product Description

Hyspan PERMA-PAX® Packed Expansion Joints are a premium quality product with standard features that are not available or are only offered as options for comparable products. The body is made from one piece, eliminating a circumferential weld in the outer diameter. Internal and external guides are made from aluminum bronze bearing material that is welded in place and line bored for alignment and a precision fit to the traveling pipe.


The sealing system consists of carbon fiber yarn impregnated with graphite combined with injected Grafoil® Flexible Graphite, optimized to minimize friction. These sealing materials remain flexible throughout the service life of the expansion joint and provide lubrication to the traveling pipe. All Perma-Pax expansion joints are hydrostatically tested and cycled, and the friction force is measured for conformance to specifications.

Since 1986 Hyspan has offered a full five-year replacement warranty on standard design Series 6500 expansion joints.

Key Features

- One-piece body construction by Hyspan proprietary forming process — no circumferential weld in the outer diameter
 - Line-bored abrasion-free aluminum bronze internal & external guides (ASME SB169)
 - Carbon fiber graphite-impregnated braided packing combined with Grafoil® Flexible Graphite injected packing
 - Self-lubricating, maintenance-free sealing system
 - Can be repacked under full system pressure
 - Minimum friction force — all joints factory cycled with friction force measured for conformance to specifications
 - Traveling pipe (slip) seal surface chrome plated 0.002" total (0.001" hard chrome over 0.001" crack-free chrome per ASTM B650)
 - Packing injector fitting permits injection of graphite flake pellets under system pressure
 - Lifting lug standard on joints over 40 lbs.
 - Drain port with plug standard on all joints
- Grafoil® is a UCAR registered trademark.*


Design Features

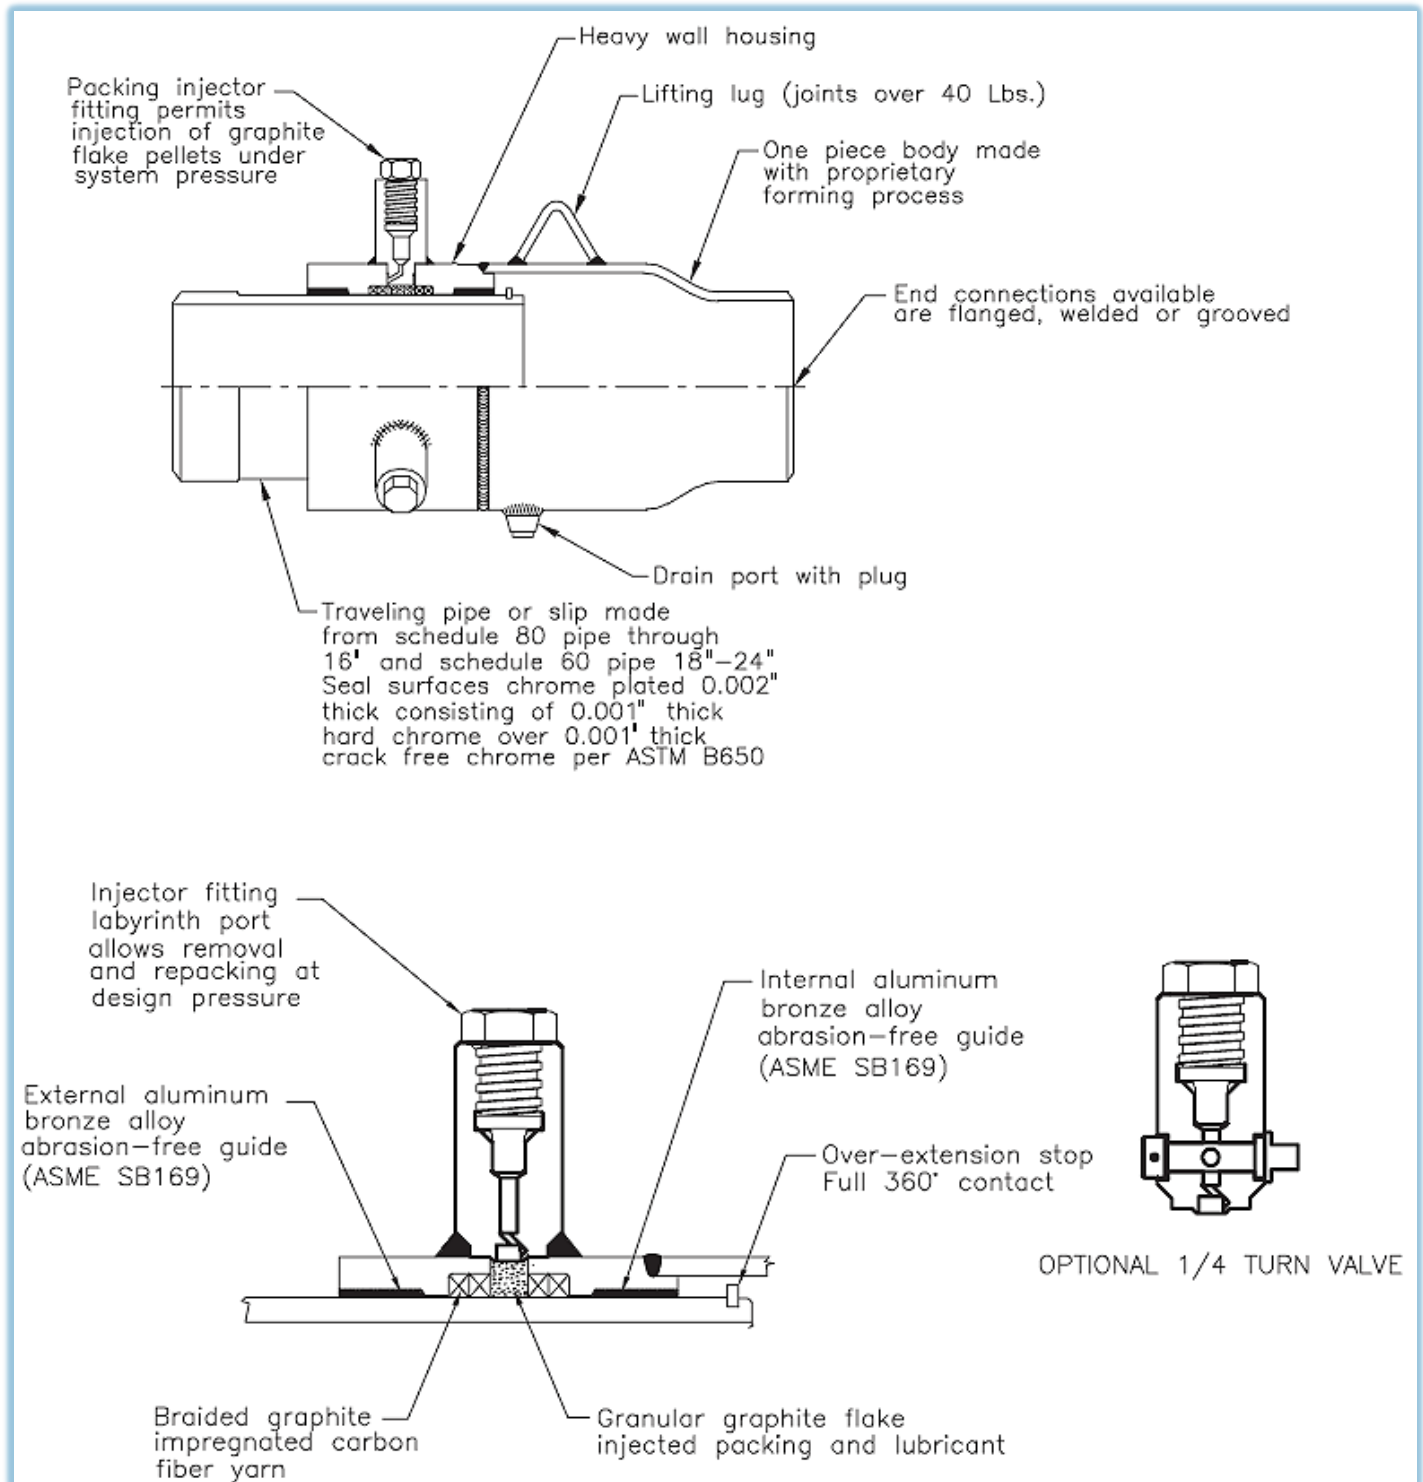


Applications

Series 6500 expansion joints are designed for installations where the principal movement is axial. Standard single configurations are designed for 4", 8", and 12" of axial compression (pipe expansion) and 1", 1.5", and 2" extension respectively. Dual configurations are designed for 8", 16", and 24" of axial compression and 2", 3", and 4" extension respectively. If the primary movement is extension (pipe contraction), the expansion joint can be preset at the factory. The piping system must include anchors to react the force produced by pressure thrust and the friction force, supports to react the weight of the pipe and media, and guides to ensure that the pipe alignment is maintained.


Single 6501/6502 adjacent to main anchor

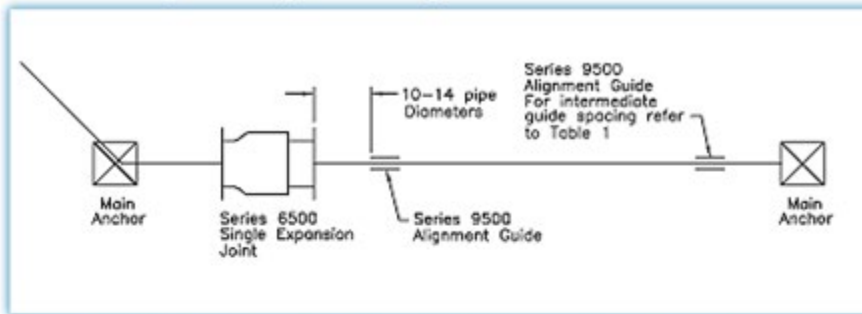


Single 6501/6502 located in the middle of a run

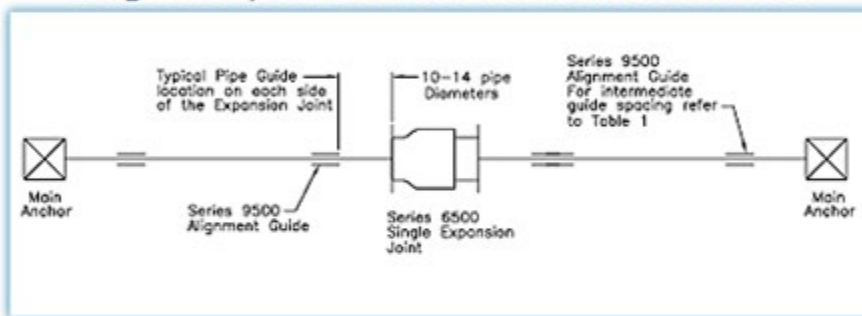

Two or more singles 6501/6502 with intermediate anchors

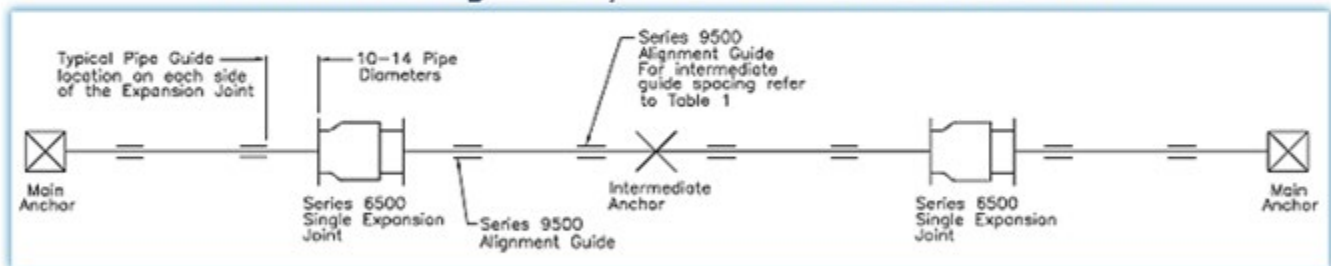

Dual anchor base 6505/6506 located in the center of a run

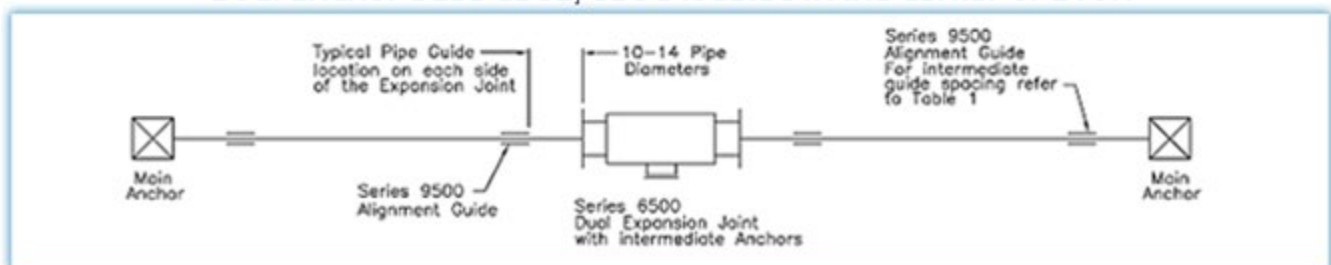

Common Applications:

- Steam systems — high pressure steam distribution and power piping
- Hot water and chilled water systems in commercial and industrial buildings
- Offshore oil and gas platforms — axial slip assemblies for drilling and production piping
- Maritime vessels and naval shipboard piping systems
- Corrosive process piping where sealing integrity and longevity are critical
- District energy systems with large axial movements

Guide Spacing & Travel

Table 1 — Intermediate Pipe Guide Spacing • Series 6500

Nominal Size (NPS)	First Guide Spacing (feet)(1)	Intermediate Guide Spacing (feet)(2)					Support Spacing(3)	
		100 psig	150 psig	200 psig	300 psig	400 psig	Water (feet)	Gas (feet)
2	2	12	11	11	10	9	10	13
2 1/2	2 1/2	16	15	14	13	12	11	14
3	3	20	18	17	15	14	12	15
4	4	25	23	21	19	17	14	17
5	5	31	28	26	23	20	16	18
6	6	37	34	31	27	24	17	21
8	8	49	43	39	34	30	19	24
10	10	61	53	48	41	36	22	27
12	12	70	61	54	46	41	23	30
14	14	74	64	57	49	43	25	32
16	16	81	70	62	53	46	27	35
18	18	88	75	67	56	50	28	37
20	20	94	80	71	60	53	30	39
24	24	105	90	79	66	58	32	42
1	2	3	4	5	6	7	8	9

Notes:

- (1) Distance from the face of the expansion joint. Recommended distance 10–14 pipe diameters; tabulated values based on 12 pipe diameters.
- (2) Based on Series 6500 friction forces and standard weight carbon steel pipe; distances are center to center; guide spacing calculated for test pressure (1.5 × design).
- (3) Tabulated support spacing values are the maximum recommended — source ASME 31.1 Power Piping Code.

Travel Required

The axial expansion or contraction of pipe is determined by the change in temperature. To select the correct travel, refer to Table 2 (Thermal Expansion of Pipe per 100 Feet) which includes tabulated values of linear change in inches per 100 feet of pipe run for steel and stainless steel pipe. The values are based on an installation temperature of 70°F.

$$\text{Thermal Expansion or Contraction (inches)} = \text{Length of run between anchors (feet)} \times \text{Linear change from Table 2} \div 100$$

During installation, if the temperature is substantially different from 70°F, it may be necessary to preset the expansion joint. Refer to Installation Preset (Table 9) to determine the preset required.

Anchor Forces

Piping systems incorporating Type 6501–6506 expansion joints must include structural reactions or main anchors as shown in the application diagrams that are designed to react the full pressure thrust force based on the effective area of the expansion joint, and the joint seal resistance force.


$$\text{Main Anchor Force (lbs.)} = \text{Pressure Force — Table 3 (lbs.)} + \text{Joint Seal Resistance Force — Column 3, Table 3 (lbs.)}$$

The pressure thrust force must be based on the highest pressure anticipated during service and testing.

The joint seal force values tabulated in Column 3 of Table 3 are the highest anticipated — at “break away.” These values are reduced by approximately 25% after motion starts.

Piping systems incorporating dual anchor base expansion joints (6505 & 6506) or multiple single joints (6501 & 6502) in long runs must include structural reactions or intermediate anchors. Intermediate anchors react the seal resistance force — the purpose of the intermediate anchor is to ensure that the pipe expansion in each segment of the run is absorbed by the expansion joint in that segment.

$$\text{Intermediate Anchor Force (lbs.)} = \text{Joint Seal Resistance Force — Column 3, Table 3 (lbs.)}$$

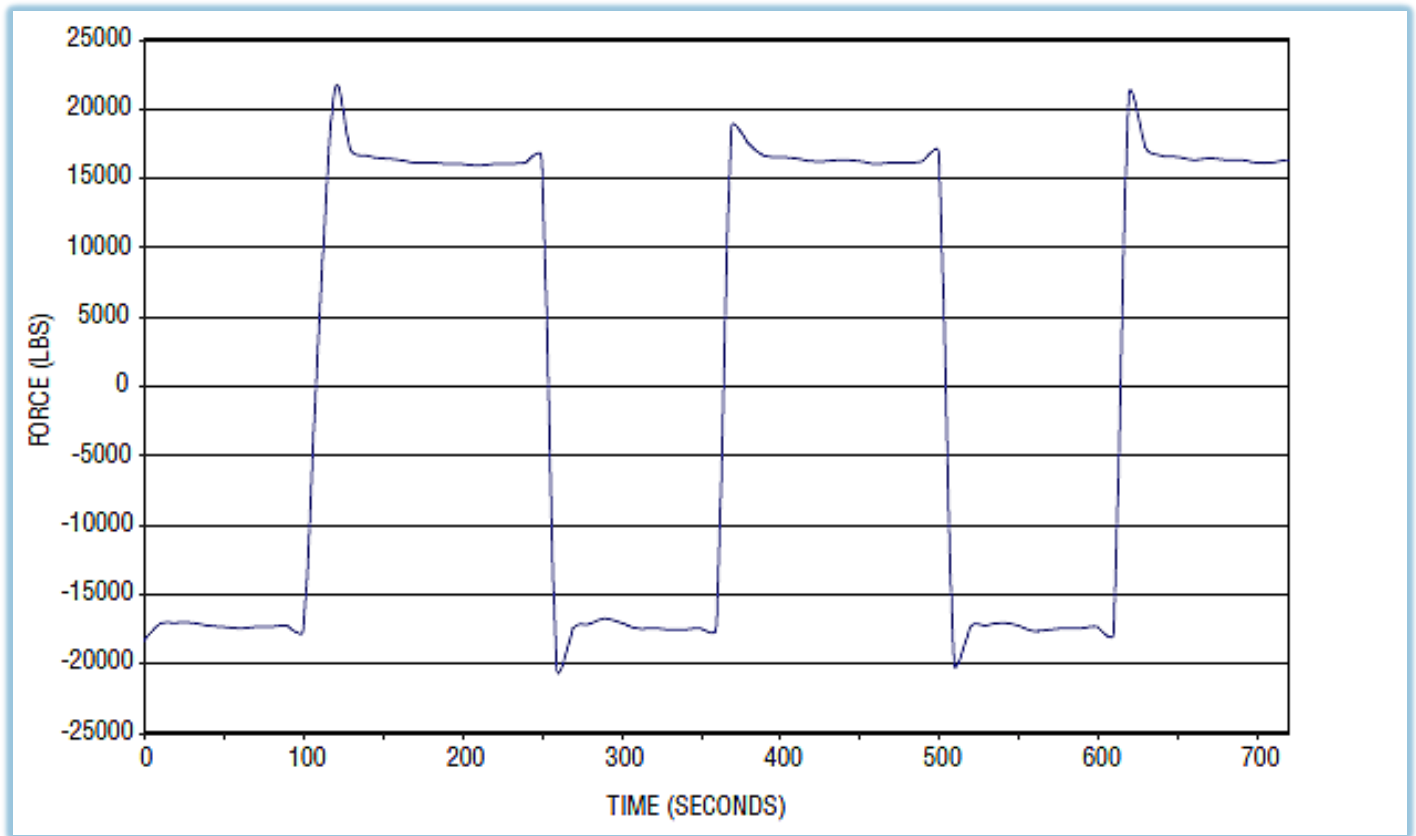

Engineering Data

Table 2 — Thermal Expansion of Pipe per 100 Feet

Linear thermal expansion of pipe per 100 feet between 70°F and the tabulated temperature. The tabulated values in Columns 5 and 6 are measured in inches per 100 feet of pipe run.

Saturated Steam		Temperature		Carbon Steel Pipe	Austenitic Stainless Steel
Vacuum (Hg)	Pressure (psig)	°F	°C		
		-50	-46	-0.84	-1.24
		0	-18	-0.49	-0.72
		25	-4	-0.32	-0.46
29.7		32	0	-0.27	-0.40
29.6		50	10	-0.14	-0.21
29.2		70	21	0	0
28.0		100	38	0.23	0.34
26.0		125	52	0.42	0.62
22.4		150	66	0.61	0.90
16.3		175	80	0.80	1.18
6.0		200	93	0.99	1.46
0		212	100	1.10	1.60
	4	225	107	1.21	1.75
	5	250	121	1.40	2.03
	31	275	135	1.61	2.32
	52	300	149	1.82	2.61
	82	325	163	2.04	2.90
	120	350	177	2.26	3.20
	169	375	191	2.48	3.50
	232	400	205	2.70	3.80
	311	425	219	2.93	4.10
	407	450	232	3.16	4.41
	525	475	246	3.39	4.71
	664	500	260	3.62	5.01
1	2	3	4	5	6

Table 3 — Pressure Thrust and Seal Force Data • Series 6500

Nominal Size (NPS)	Effective Area (square inches)	Joint Seal Force (lbs)	Tabulated Force (pounds) for Individual Pressure					
			50 psig	100 psig	150 psig	225 psig	300 psig	450 psig
2	4.0	1700	199	398	596	895	1193	1789
2 1/2	5.9	2125	297	594	891	1337	1782	2673
3	8.9	2550	447	895	1342	2013	2684	4026
4	15.0	3400	752	1503	2255	3382	4510	6765
5	23.2	4250	1161	2322	3483	5225	6966	10449
6	32.5	5100	1627	3255	4882	7323	9764	14647
8	55.9	6800	2796	5591	8387	12581	16774	25161
10	86.6	8500	4330	8659	12989	19483	25977	38966
12	123.0	10,200	6136	12272	18480	27612	36816	55224
14	148.0	11,900	7424	14849	22274	33410	44547	66821
16	195.0	13,600	9742	19483	29225	43837	58449	87674
18	247.0	15,300	12373	24745	37118	55676	74235	111353
20	306.0	17,000	15318	30636	45954	68931	91908	137862
24	443.0	20,400	22151	44301	66452	99677	132903	199355
1	2	3	4	5	6	7	8	9

Note: The seal force, column 3, is the maximum value allowed. Each joint is cycled and the value measured for quality assurance.

Materials & Dimensions

The following materials, processes, and specifications are used for the construction of all standard Series 6500 expansion joints.

- **Slip (Traveling Pipe):** Schedule 80 ASME A53 Gr. B pipe through 16" diameter; Schedule 60 ASME A53 Gr. B pipe 18" through 24" diameter. The seal surface is precision machined and coated to a total thickness of 0.002" consisting of a 0.001" thick layer of crack-free chrome over a 0.001" thick layer of industrial hard chrome in accordance with ASTM B 650.
- **Over Travel Stop Ring:** ASTM A240 austenitic stainless steel.
- **Body:** One-piece construction formed by a Hyspan proprietary process made from ASME A53 Gr. B pipe. Schedule is standard weight unless otherwise specified.
- **Drain Port and Plug:** 3000 lb. thread-o-let made from ASME A105 steel forging.
- **Seal Housing:** C1018 steel or ASME A53 Gr. B heavy wall pipe.
- **Injector Fitting Body:** C1018 steel. Optional injectors with 1/4 turn safety valves include an austenitic stainless steel valve stem.
- **Injector Fitting Plunger:** AISI 1144 high strength steel.
- **Internal and External Guides:** ASME SB169 aluminum bronze abrasion-free alloy.
- **Braided Packing:** Braided graphite-impregnated carbon fiber yarn.
- **Injected Packing:** Graphite flakes with synthetic oil carrier, Grafoil® Flexible Graphite.
- **Flanges:** ASME/ANSI B16.5 150 lb. or 300 lb. raised face slip-on ASME A105 forged steel.
- **Weld End Preparation:** ASME/ANSI B16.9 beveled 37.5° for standard weight pipe unless otherwise specified.
- **Grooved End Preparation:** ASME/AWWA C606-87.
- **Anchor Base:** ASME A36 steel plate.

Grafoil® is a UCAR registered trademark. Additional packing is available in kits of 13 pellets for maintenance of installed expansion joints.


Table 4 — Dimensional Data • Series 6500

Nominal Size (NPS)	Body Outside Diameter (inches)	Radial Clearance Required (inches)	Number of Packing Fittings	Centerline Height (inches) 6501AB 6502AB 6505 6506	Drain Port Size (NPS)	Anchor Base Pattern 6501AB, 6502AB, 6505, 6506				
						Hole Diameter (inches)	Base Length (L) (inches)	Base Width (W) (inches)	Hole Spacing (inches)	
									A	B
2	3.50	8.88	2	3.88	1/2	0.625	6.0	7.0	5.0	4.0
2 1/2	4.00	9.00	2	4.88	1/2	0.625	6.0	7.0	5.0	4.0
3	4.50	9.31	2	4.88	1/2	0.625	6.0	7.5	5.5	4.0
4	5.56	9.88	2	5.50	1/2	0.625	6.0	9.5	7.5	4.0
5	6.63	10.38	3	6.50	1/2	0.875	6.0	9.5	7.5	4.0
6	8.63	11.38	3	6.50	3/4	0.875	8.0	12.0	10.0	6.0
8	10.75	12.50	4	9.25	3/4	1.125	9.0	13.0	10.0	6.0
10	12.75	13.50	4	9.75	3/4	1.125	11.0	17.0	14.0	8.0
12	14.00	14.00	5	12.00	3/4	1.375	12.0	20.0	16.0	8.0
14	16.00	15.00	5	15.50	3/4	1.375	12.0	22.0	18.0	8.0
16	18.00	16.00	6	15.50	1	1.375	14.0	22.0	18.0	10.0
18	20.00	17.00	6	16.25	1	1.375	14.0	22.0	18.0	10.0
20	22.00	18.00	8	18.00	1	1.625	19.0	27.0	22.0	14.0
24	26.25	20.18	8	20.00	1	1.625	19.0	27.0	22.0	14.0
1	2	3	4	5	6	7	8	9	10	11

Ordering Instructions


Refer to Tables 5 through 8 to select the configuration and service conditions required for your application. If the travel required is unknown, see the method of calculation in the Guide Spacing & Travel section.

Part Number Structure

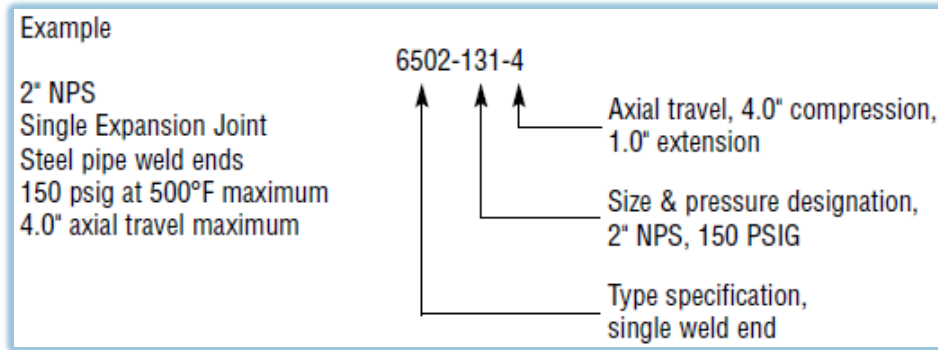

Single expansion joints 6501 and 6502 ordered with anchor base are identified as 6501AB and 6502AB. Anchor bases are standard on dual anchor base joints 6505 and 6506 and do not require the AB suffix.

Anchor Base & Injector Fitting Diagrams

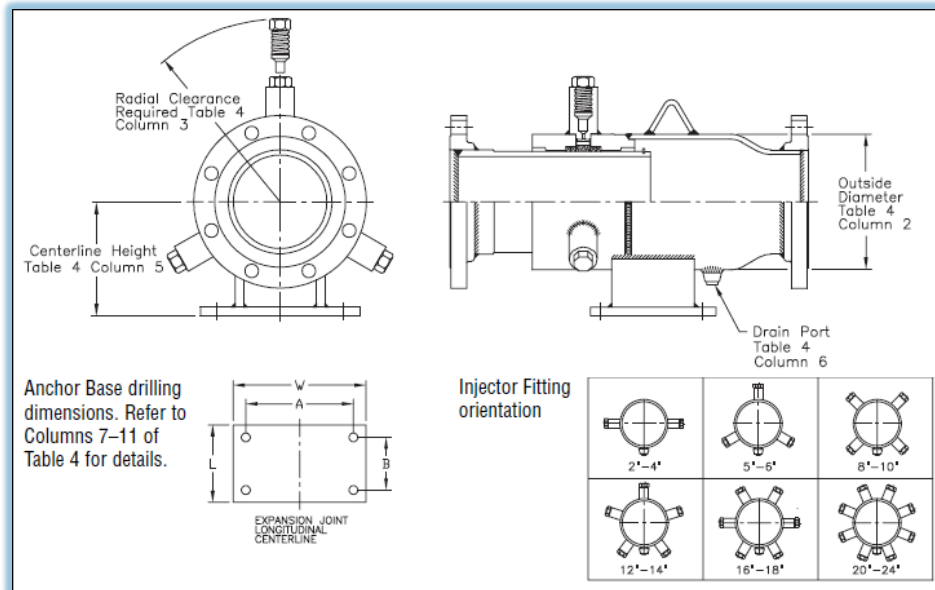

Optional Features

Optional features must be specified by a written description accompanying the part number. Available options include:

- Higher rated pressure and temperature
- Alternative materials
- Vent or instrumentation ports
- Factory preset of overall length
- Service outlets (size and orientation must be specified)
- Grooved end attachments
- ¼ Turn valve on each injector fitting
- Threaded adjusting rods for field preset

Design Data Tables

The following tables provide dimensional and weight data for all standard Series 6500 configurations. Refer to Table 3 for pressure thrust and seal force data for anchor force calculations.

Table 5 — Type 6501 & 6502 • 150 PSIG

Design Pressure: 150 PSIG • Test Pressure: 225 PSIG • Design Temperature: 500°F

Nominal Size (NPS)	Part Number 6501 6502	Axial Comp. (inches)	Axial Ext. (inches)	6501 Fixed Flange		6502 Weld End	
				Overall Length (inches)	Weight (lbs)	Overall Length (inches)	Weight (lbs)
2	-131-4	4.0	1.0	19.75	27	19.25	17
	-131-8	8.0	1.5	28.75	31	28.25	21
	-131-12	12.0	2.0	37.75	34	37.25	24
2 1/2	-135-4	4.0	1.0	20.38	39	19.75	23
	-135-8	8.0	1.5	29.38	45	28.75	29
	-135-12	12.0	2.0	38.38	50	37.75	34
3	-140-4	4.0	1.0	21.75	48	21.00	30
	-140-8	8.0	1.5	30.75	55	30.00	37
	-140-12	12.0	2.0	39.75	61	39.00	43
4	-148-4	4.0	1.0	23.63	70	22.88	44
	-148-8	8.0	1.5	32.63	80	31.88	54
	-148-12	12.0	2.0	41.63	89	40.88	63
5	-155-4	4.0	1.0	25.25	94	24.25	64
	-155-8	8.0	1.5	34.25	107	33.25	77
	-155-12	12.0	2.0	43.25	120	42.25	90
6	-160-4	4.0	1.0	25.75	140	24.75	106
	-160-8	8.0	1.5	34.75	157	33.75	123
	-160-12	12.0	2.0	43.75	174	42.75	140
8	-167-4	4.0	1.0	27.63	238	26.38	182
	-167-8	8.0	1.5	36.63	265	35.38	209
	-167-12	12.0	2.0	45.63	293	44.38	237
10	-174-4	4.0	1.0	28.38	319	27.13	239
	-174-8	8.0	1.5	37.38	359	36.13	279
	-174-12	12.0	2.0	46.38	398	45.13	318
12	-180-4	4.0	1.0	30.00	419	28.50	297
	-180-8	8.0	1.5	39.00	470	37.50	348
	-180-12	12.0	2.0	48.00	520	46.50	398
14	-181-4	4.0	1.0	31.38	537	29.88	371
	-181-8	8.0	1.5	40.38	593	38.88	427
	-181-12	12.0	2.0	49.38	649	47.88	483
16	-182-4	4.0	1.0	32.38	622	30.88	410
	-182-8	8.0	1.5	41.38	681	39.88	469
	-182-12	12.0	2.0	50.38	740	48.88	528
18	-183-4	4.0	1.0	34.63	755	33.13	537
	-183-8	8.0	1.5	43.63	828	42.13	610
	-183-12	12.0	2.0	52.63	900	51.13	682
20	-184-4	4.0	1.0	35.88	951	34.13	655
	-184-8	8.0	1.5	44.88	1037	43.13	741
	-184-12	12.0	2.0	53.88	1125	52.13	829
24	-186-4	4.0	1.0	37.13	1420	35.13	1012
	-186-8	8.0	1.5	46.13	1555	44.13	1147
	-186-12	12.0	2.0	55.13	1692	53.13	1284
1	2	3	4	5	6	7	8



Table 6 — Type 6505 & 6506 • 150 PSIG

Design Pressure: 150 PSIG • Test Pressure: 225 PSIG • Design Temperature: 500°F

Nominal Size (NPS)	Part Number 6505 6506	Total Axial Compression (inches)	Total Axial Extension (inches)	6505 Fixed Flange Center Anchor Base		6506 Weld End Center Anchor Base	
				Overall Length (inches)	Weight (lbs)	Overall Length (inches)	Weight (lbs)
2	-131-8	8.0	2.0	33.00	49	32.50	39
	-131-16	16.0	3.0	51.00	59	50.50	49
	-131-24	24.0	4.0	69.00	68	68.50	58
2 1/2	-135-8	8.0	2.0	33.38	65	32.75	49
	-135-16	16.0	3.0	51.38	77	50.75	61
	-135-24	24.0	4.0	69.38	89	68.75	73
3	-140-8	8.0	2.0	35.25	78	34.50	60
	-140-16	16.0	3.0	53.25	94	52.50	76
	-140-24	24.0	4.0	71.25	109	70.50	91
4	-148-8	8.0	2.0	38.25	115	37.50	89
	-148-16	16.0	3.0	56.25	137	55.50	111
	-148-24	24.0	4.0	74.25	158	73.50	132
5	-155-8	8.0	2.0	41.00	153	40.00	123
	-155-16	16.0	3.0	59.00	183	58.00	153
	-155-24	24.0	4.0	77.00	213	76.00	183
6	-160-8	8.0	2.0	43.00	250	42.00	216
	-160-16	16.0	3.0	61.00	288	60.00	254
	-160-24	24.0	4.0	79.00	326	78.00	292
8	-167-8	8.0	2.0	46.00	419	44.75	363
	-167-16	16.0	3.0	64.00	482	62.75	426
	-167-24	24.0	4.0	82.00	545	80.75	489
10	-174-8	8.0	2.0	47.00	567	45.75	487
	-174-16	16.0	3.0	65.00	656	63.75	576
	-174-24	24.0	4.0	83.00	745	81.75	665
12	-180-8	8.0	2.0	48.00	725	46.50	603
	-180-16	16.0	3.0	66.00	839	64.50	717
	-180-24	24.0	4.0	84.00	953	82.50	831
14	-181-8	8.0	2.0	50.50	840	49.00	674
	-181-16	16.0	3.0	68.50	966	67.00	800
	-181-24	24.0	4.0	86.50	1092	85.00	926
16	-182-8	8.0	2.0	51.75	987	50.25	775
	-182-16	16.0	3.0	69.75	1121	68.25	909
	-182-24	24.0	4.0	87.75	1254	86.25	1042
18	-183-8	8.0	2.0	55.50	1243	54.00	1025
	-183-16	16.0	3.0	73.50	1406	72.00	1188
	-183-24	24.0	4.0	91.50	1568	90.00	1350
20	-184-8	8.0	2.0	57.00	1928	55.25	1632
	-184-16	16.0	3.0	75.00	2201	73.25	1905
	-184-24	24.0	4.0	93.00	2473	91.25	2177
24	-186-8	8.0	2.0	60.00	2450	58.00	2042
	-186-16	16.0	3.0	78.00	2757	76.00	2349
	-186-24	24.0	4.0	96.00	3064	94.00	2656
1	2	3	4	5	6	7	8

**6505
FIXED FLANGE
DUAL ANCHOR BASE**



**6506
WELD END
DUAL ANCHOR BASE**



Note: For Types 6505 and 6506 the travel stated is the total; travel each side of the anchor base is 1/2 of the tabulated value.

Table 7 — Type 6501 & 6502 • 300 PSIG

Design Pressure: 300 PSIG • Test Pressure: 450 PSIG • Design Temperature: 500°F

Nominal Size (NPS)	Part Number 6501 6502	Axial Comp. (inches)	Axial Ext. (inches)	6501 Fixed Flange		6502 Weld End	
				Overall Length (inches)	Weight (lbs)	Overall Length (inches)	Weight (lbs)
2	-331-4	4.0	1.0	19.75	31	19.25	17
	-331-8	8.0	1.5	28.75	35	28.25	21
	-331-12	12.0	2.0	37.75	38	37.25	24
2 1/2	-335-4	4.0	1.0	20.38	43	19.75	23
	-335-8	8.0	1.5	29.38	49	28.75	29
	-335-12	12.0	2.0	38.38	54	37.75	34
3	-340-4	4.0	1.0	21.75	56	21.00	30
	-340-8	8.0	1.5	30.75	63	30.00	37
	-340-12	12.0	2.0	39.75	69	39.00	43
4	-348-4	4.0	1.0	23.63	91	22.88	44
	-348-8	8.0	1.5	32.63	101	31.88	54
	-348-12	12.0	2.0	41.63	110	40.88	63
5	-355-4	4.0	1.0	25.25	122	24.25	64
	-355-8	8.0	1.5	34.25	135	33.25	77
	-355-12	12.0	2.0	43.25	148	42.25	90
6	-360-4	4.0	1.0	25.75	178	24.75	106
	-360-8	8.0	1.5	34.75	195	33.75	123
	-360-12	12.0	2.0	43.75	212	42.75	140
8	-367-4	4.0	1.0	27.63	294	26.38	182
	-367-8	8.0	1.5	36.63	321	35.38	201
	-367-12	12.0	2.0	45.63	349	44.38	237
10	-374-4	4.0	1.0	28.38	393	27.13	239
	-374-8	8.0	1.5	37.38	433	36.13	279
	-374-12	12.0	2.0	46.38	472	45.13	318
12	-380-4	4.0	1.0	30.00	523	28.50	297
	-380-8	8.0	1.5	39.00	574	37.50	348
	-380-12	12.0	2.0	48.00	624	46.50	398
14	-381-4	4.0	1.0	31.38	689	29.88	371
	-381-8	8.0	1.5	40.38	745	38.88	427
	-381-12	12.0	2.0	49.38	801	47.88	483
16	-382-4	4.0	1.0	32.38	830	30.88	410
	-382-8	8.0	1.5	41.38	889	39.88	469
	-382-12	12.0	2.0	50.38	948	48.88	528
18	-383-4	4.0	1.0	34.63	1043	33.13	537
	-383-8	8.0	1.5	43.63	1116	42.13	610
	-383-12	12.0	2.0	52.63	1188	51.13	682
20	-384-4	4.0	1.0	35.88	1269	34.13	655
	-384-8	8.0	1.5	44.88	1355	43.13	741
	-384-12	12.0	2.0	53.88	1443	52.13	829
24	-386-4	4.0	1.0	39.13	1691	35.13	1079
	-386-8	8.0	1.5	48.13	1826	44.13	1214
	-386-12	12.0	2.0	57.13	1963	53.13	1351
1	2	3	4	5	6	7	8



Table 8 — Type 6505 & 6506 • 300 PSIG

Design Pressure: 300 PSIG • Test Pressure: 450 PSIG • Design Temperature: 500°F

Nominal Size (NPS)	Part Number 6505 6506	Total Axial Compression (inches)	Total Axial Extension (inches)	6505 Fixed Flange Center Anchor Base		6506 Weld End Center Anchor Base	
				Overall Length (inches)	Weight (lbs)	Overall Length (inches)	Weight (lbs)
2	-331-8	8.0	2.0	33.00	53	32.50	39
	-331-16	16.0	3.0	51.00	63	50.50	49
	-331-24	24.0	4.0	69.00	72	68.50	58
2 1/2	-335-8	8.0	2.0	33.38	69	32.75	49
	-335-16	16.0	3.0	51.38	81	50.75	61
	-335-24	24.0	4.0	69.38	93	68.75	73
3	-340-8	8.0	2.0	35.25	86	34.50	60
	-340-16	16.0	3.0	53.25	102	52.50	76
	-340-24	24.0	4.0	71.25	117	70.50	91
4	-348-8	8.0	2.0	38.25	136	37.50	89
	-348-16	16.0	3.0	56.25	158	55.50	111
	-348-24	24.0	4.0	74.25	179	73.50	132
5	-355-8	8.0	2.0	41.00	181	40.00	123
	-355-16	16.0	3.0	59.00	211	58.00	153
	-355-24	24.0	4.0	77.00	241	76.00	183
6	-360-8	8.0	2.0	43.00	288	42.00	216
	-360-16	16.0	3.0	61.00	326	60.00	254
	-360-24	24.0	4.0	79.00	364	78.00	292
8	-367-8	8.0	2.0	46.00	475	44.75	363
	-367-16	16.0	3.0	64.00	538	62.75	426
	-367-24	24.0	4.0	82.00	601	80.75	489
10	-374-8	8.0	2.0	47.00	641	45.75	487
	-374-16	16.0	3.0	65.00	730	63.75	576
	-374-24	24.0	4.0	83.00	819	81.75	665
12	-380-8	8.0	2.0	48.00	829	46.50	603
	-380-16	16.0	3.0	66.00	943	64.50	717
	-380-24	24.0	4.0	84.00	1057	82.50	831
14	-381-8	8.0	2.0	50.50	992	49.00	674
	-381-16	16.0	3.0	68.50	1118	67.00	800
	-381-24	24.0	4.0	86.50	1244	85.00	926
16	-382-8	8.0	2.0	51.75	1195	50.25	775
	-382-16	16.0	3.0	69.75	1329	68.25	909
	-382-24	24.0	4.0	87.75	1462	86.25	1042
18	-383-8	8.0	2.0	55.50	1531	54.00	1025
	-383-16	16.0	3.0	73.50	1694	72.00	1188
	-383-24	24.0	4.0	91.50	1856	90.00	1350
20	-384-8	8.0	2.0	57.00	2246	55.25	1632
	-384-16	16.0	3.0	75.00	2519	73.25	1905
	-384-24	24.0	4.0	93.00	2791	91.25	2177
24	-386-8	8.0	2.0	62.00	2692	58.00	2080
	-386-16	16.0	3.0	80.00	3021	76.00	2409
	-386-24	24.0	4.0	98.00	3351	94.00	2739
1	2	3	4	5	6	7	8

**6505
FIXED FLANGE
DUAL ANCHOR BASE**



**6506
WELD END
DUAL ANCHOR BASE**



Note: For Types 6505 and 6506 the travel stated is the total; travel each side of the anchor base is 1/2 of the tabulated value.

Installation & Maintenance

Application

Series 6500 Perma-Pax Packed Expansion Joints are designed for applications where the principal motion is axial to the centerline of the expansion joint, and the system includes guides, supports, and anchors sufficient to restrain the piping at the service and test conditions. Steam systems must include adequate traps to remove condensate. Liquid systems must include surge compensation.

Operating Conditions

Series 6500 expansion joints are supplied with a tag attached stating the Part Number and Design Pressure. Standard designs are 150 PSIG and 300 PSIG, and the test pressures are 225 PSIG and 450 PSIG respectively. The design temperature for all standard joints is 500°F. Be certain that the system conditions and test conditions do not exceed the design values.

Movement

The axial travel of the joint is included in the part number as the last digit(s). For example, P/N 6501-148-4 is designed for 4" axial travel. Consult the purchase specification to confirm the correct part number and location in the system. Refer to the Travel Required section for the method of calculating travel.

Flow Direction and Orientation

The flow direction can be either direction for Series 6500 expansion joints. Be certain that the free end is attached to the pipe that expands on single joints (6501 & 6502) with an anchor base. The drain port must be at the bottom of the joint for horizontal and vertical installations.

Media & Environment

Series 6500 expansion joints are for properly maintained steam, hot water, and chilled water systems. They can be used for other media that are compatible with the materials of construction. Be certain that the exterior of the expansion joint is not exposed to corrosive substances such as minerals in ground water and road salt.

Guides, Supports, Anchors

Series 6500 Perma-Pax Packed Expansion Joints are designed for applications where the principal movement is axial to the centerline of the expansion joint, and the system includes guides, supports, and anchors. Refer to the Applications section for system requirements. Refer to Hyspan Series 9500 for pipe alignment guide design information.

Anchor Base

Type 6505 and 6506 dual expansion joints include an anchor base to ensure that the travel on each side of the base is absorbed on that side. Refer to intermediate anchor forces in the Anchor Forces section for force required. Single expansion joints, Types 6501 and 6502, are available with an anchor base designed as a main anchor. The anchor base height and base pattern for both configurations are given in Table 4.

CAUTION: The structure attached to the anchor base must be capable of restraining the thrust forces and moments developed by the expansion joint.

Shipping Restraints

External restraints are installed at the factory to ensure installation at the correct length and alignment. They are painted yellow and labeled — "Shipping Bars, Remove after Installation." Leave these restraints installed until after the installation of the expansion joint is complete, but they must be removed prior to pressure testing.

CAUTION: Shipping Bars are not designed to react the pressure thrust of the expansion joint — they must be removed prior to testing. Normally the shipping restraints are installed by welding — remove by cutting and grinding welds flush.

Standard expansion joints are factory set for the travel tabulated in this catalog. The principal travel is axial compression (pipe expansion) with allowance for extension if the pipe temperature is reduced below the installation temperature.

Post-Installation Inspection

1. Inspect the expansion joint for damage.
2. Are the Shipping Restraints removed?
3. Is the joint free to move and is the pipe supported and guided to ensure that the pipe motion is axial to the expansion joint?
4. Is the expansion joint installed at the correct location and are the anchors, guides, and supports installed in accordance with the system design?
5. Are the guides and supports free to allow the movement of the expansion joint?
6. Is the supporting structure for the anchor adequate to react the forces and moments?

Installation Preset

Series 6500 expansion joints can be ordered from the factory preset; however, if it is necessary to change the travel during installation, the shipping bars must be removed and the length adjusted. Table 9 is a tabulation of the thermal expansion or contraction for various pipe run lengths corresponding to temperature differences from 70°F.

For example, if the expansion joint is used as a replacement in a system that has not cooled down, and the pipe temperature is 170°F over a 200-foot run, the joint must be compressed 1.53". Refer to Table 3 for the friction force required to compress or extend the joint. Series 6500 expansion joints can be ordered with factory-installed threaded adjusting rods for field presetting.

Table 9 — Installation Preset (Steel Pipe)

Temperature Difference	Distance Between Anchors—Feet					
	50	100	150	200	250	300
20	0.08	0.15	0.23	0.31	0.38	0.46
30	0.11	0.23	0.34	0.46	0.57	0.69
40	0.15	0.31	0.46	0.61	0.76	0.92
50	0.19	0.68	0.57	0.76	0.95	1.15
60	0.23	0.46	0.69	0.92	1.15	1.37
70	0.27	0.53	0.80	1.07	1.34	1.60
80	0.31	0.61	0.92	1.22	1.53	1.83
90	0.34	0.69	1.03	1.37	1.72	2.06
100	0.38	0.76	1.15	1.53	1.91	2.29
110	0.42	0.84	1.26	1.68	2.10	2.52
120	0.46	0.92	1.37	1.83	2.29	2.75
140	0.53	1.07	1.60	2.14	2.67	3.20
160	0.61	1.22	1.83	2.44	3.05	3.66
180	0.69	1.37	2.06	2.75	3.43	4.12
200	0.76	1.53	2.29	3.05	3.82	4.57
1	2	3	4	5	6	7

Maintenance

The packing system incorporated into Series 6500 expansion joints provides combined sealing and lubrication. Packing can be added under full line pressure; however, this is only necessary if a leak occurs, and only enough packing should be added to stop the leak.

1. Standard Injectors: Remove the Plunger nearest the leak and add one packing plug. Inject the packing by resetting the Plunger. Continue this process by adding packing to the remaining Injectors until the leak stops.
2. Injectors with Safety Valves: As an optional feature a ¼ turn valve can be incorporated into the Injector. If the valve is installed it should be turned 90° (off) prior to removing the Plunger. Insert the packing and start the Plunger. Open the valve and inject the packing. Follow the procedure from Paragraph 1.

Engineering Support

Custom Engineered Solutions

Hyspan designs and manufactures Series 6500 expansion joints for custom applications including elevated pressure and temperature service, special materials, and diameters greater than 24". Hyspan's engineering team supports specification review, reverse engineering of legacy components, and development of application-specific expansion joint systems.

Size Range	2" to 24" NPS standard; larger diameters available
Pressure Range	Above 300 PSIG by special design
Temperature Range	Above 500°F by special design
Materials	Alternate materials including stainless steel, Inconel, and specialty alloys
Custom Options	Large diameter slip assemblies, specialty packing materials, severe environment configurations
Example Projects	Axial slip assembly for offshore drilling platform; naval shipboard expansion joint system

Contact Hyspan

Headquarters	1685 Brandywine Avenue, Chula Vista, CA 91911
Phone	619.421.1355
Email	websales@hyspan.com
Website	hyspan.com
LinkedIn	linkedin.com/company/hyspan-precision-products-inc-/

Ordering Guidance

To place an order or request a quotation, contact Hyspan with the following information:

- Product series and type designation (e.g., Series 6500 Type 6502)
- Nominal pipe size (NPS)
- Design pressure (150 or 300 PSIG) and temperature
- End connection type (flanged, weld end, or grooved)
- Axial travel required (4", 8", or 12" for single; 8", 16", or 24" for dual)
- Whether anchor base is required
- Special materials, coatings, or certifications required
- Applicable code or standard (ASME, ASTM, NAVSEA, etc.)
- Quantity and requested delivery

Warranty

Five (5) Year Limited Warranty — Series 6500

This warranty is given by HYSpan PRECISION PRODUCTS, INC. (HYSpan) for the benefit of the first purchasers for use of its Series 6500 Packed Expansion Joints manufactured by HYSpan to standard catalog construction. The product is warranted to be free from defects in material and workmanship, and to be leak-free for a period of five (5) years from the date of shipment by HYSpan in accordance with the following conditions:

1. The design pressure and temperature are not exceeded — including surge and upset conditions.
2. The installation conforms to HYSpan installation instructions and approved practice for anchoring, supporting and guiding, and generally accepted good piping practice.
3. Substances in contact with all internal and external surfaces must be compatible with the materials of construction, including all contaminants.
4. The warranty shall be limited to the replacement by HYSpan of the same model Series 6500 expansion joint, and payment for transportation by the least expensive method. Labor, material, and other costs related to the failure or replacement of the expansion joint are not included. HYSpan shall not be liable for damage or delay suffered by the purchaser regardless of whether such damages are general, special or consequential in nature, whether caused by defective material or workmanship, or whether caused by HYSpan's negligence regardless of the degree.
5. HYSpan warranties satisfactory leak-free performance. If leakage occurs through the packing and cannot be prevented by the addition of packing by the user in accordance with the field packing installation instructions, HYSpan will repair or replace the expansion joint within the terms of this warranty.
6. This warranty is expressed in lieu of all other warranties, expressed or implied, including the warranty of merchantability, the implied warranty of fitness for a particular purpose, and all other obligations or liabilities on the part of HYSpan, and it neither assumes nor authorizes any other persons to assume for HYSpan any other liabilities in connection with the sale of the products.
7. The warranty is limited to installations in the United States, Puerto Rico, and Canada.

The purchaser shall advise the HYSpan factory of any warranty claim including the nature of the failure and the serial number of the expansion joint (permanently located adjacent to the lifting lug). HYSpan shall provide return goods authorization and shipping directions to return the failed joint to the factory. A mutually agreeable delivery schedule and method of shipping the replacement shall be established. The purchaser shall furnish a confirming purchase order and is obligated to the current replacement cost of the joint and shipping expense. Upon receipt of the failed product, the cause of failure shall be determined by the factory at no expense to the purchaser. A credit shall be issued by the factory for the replacement cost and least expensive shipping for valid warranty claims. In the event of a dispute, HYSpan shall furnish the failed product to the purchaser or their representative for failure analysis.



Hyspan Precision Products, Inc. · 1685 Brandywine Avenue · Chula Vista, CA 91911
+1 619.421.1355 · websales@hyspan.com · hyspan.com

© 2026 Hyspan Precision Products, Inc. All rights reserved.